

# Username and Password

Default Username - Disabling Authentication - Resetting Password

- [Default Username and Password](#)
- [Disable Authentication](#)
- [Reset Password](#)
- [Unable to Login In](#)


# Default Username and Password

When you access Reactor (the configuration web page) you are met by a login screen, asking for username and password.

The default factory username and password is:

Username: admin

Password: skaarhoj

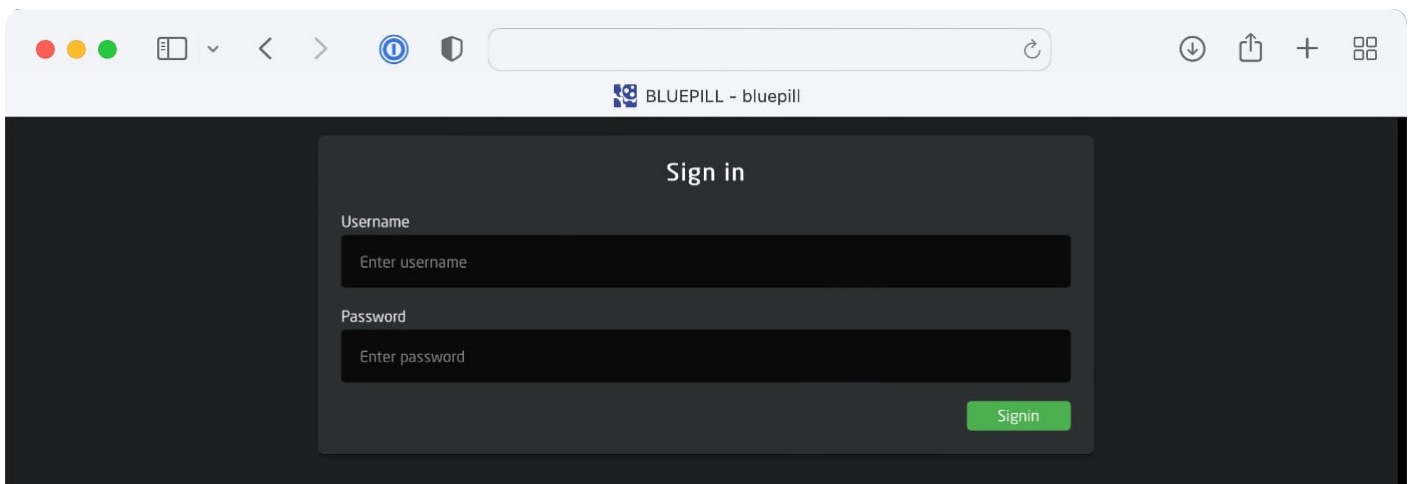


# Disable Authentication

The login screen, where you enter username and password, can be disabled. This removes the need to enter username and password at all.

1. First log in as normal
2. Click 'Settings' in main menu



3. Click to disable 'Authentication'

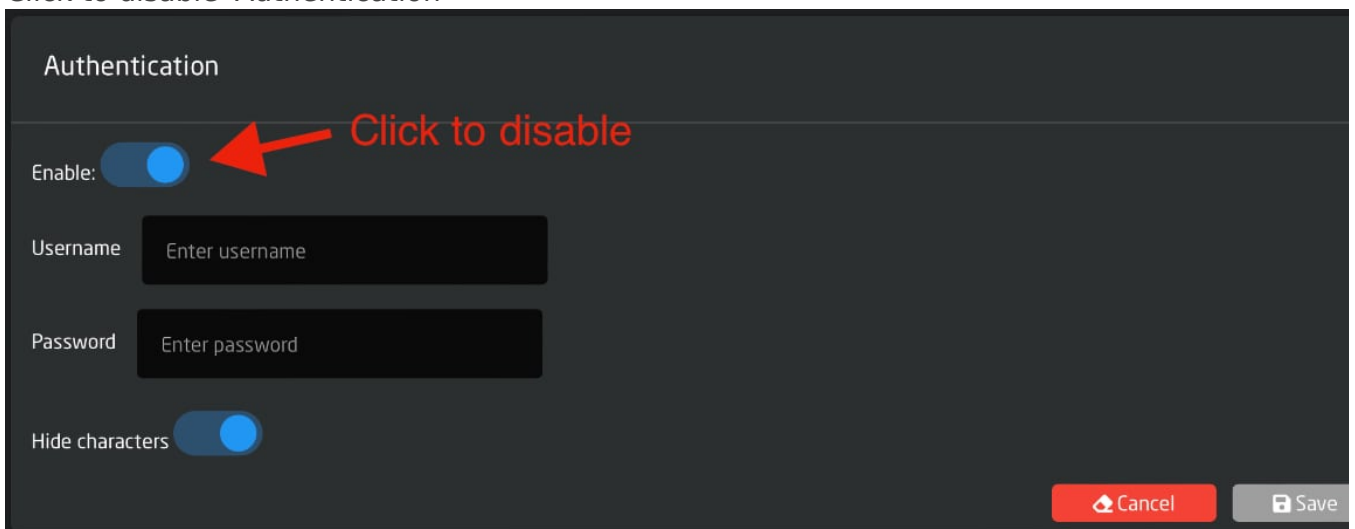

# Reset Password

If you have forgotten the username or password for your Blue Pill product you can use one of these procedures to reset them.

**Note:** We introduced a new and much easier way to reset the password in System Manager v.1.0.8 software update. Please try the new method first - and if it does not work (your panel is running older software), use the old method below instead.


---

**NEW METHOD** -> used with System Manager v.1.0.8-pre8 or later

---

1. Power on device - you know it's ready if you can access the login webpage

2. Insert a pin and press the config button on Blue Pill - keep holding it pressed for 5 seconds until you see a purple light

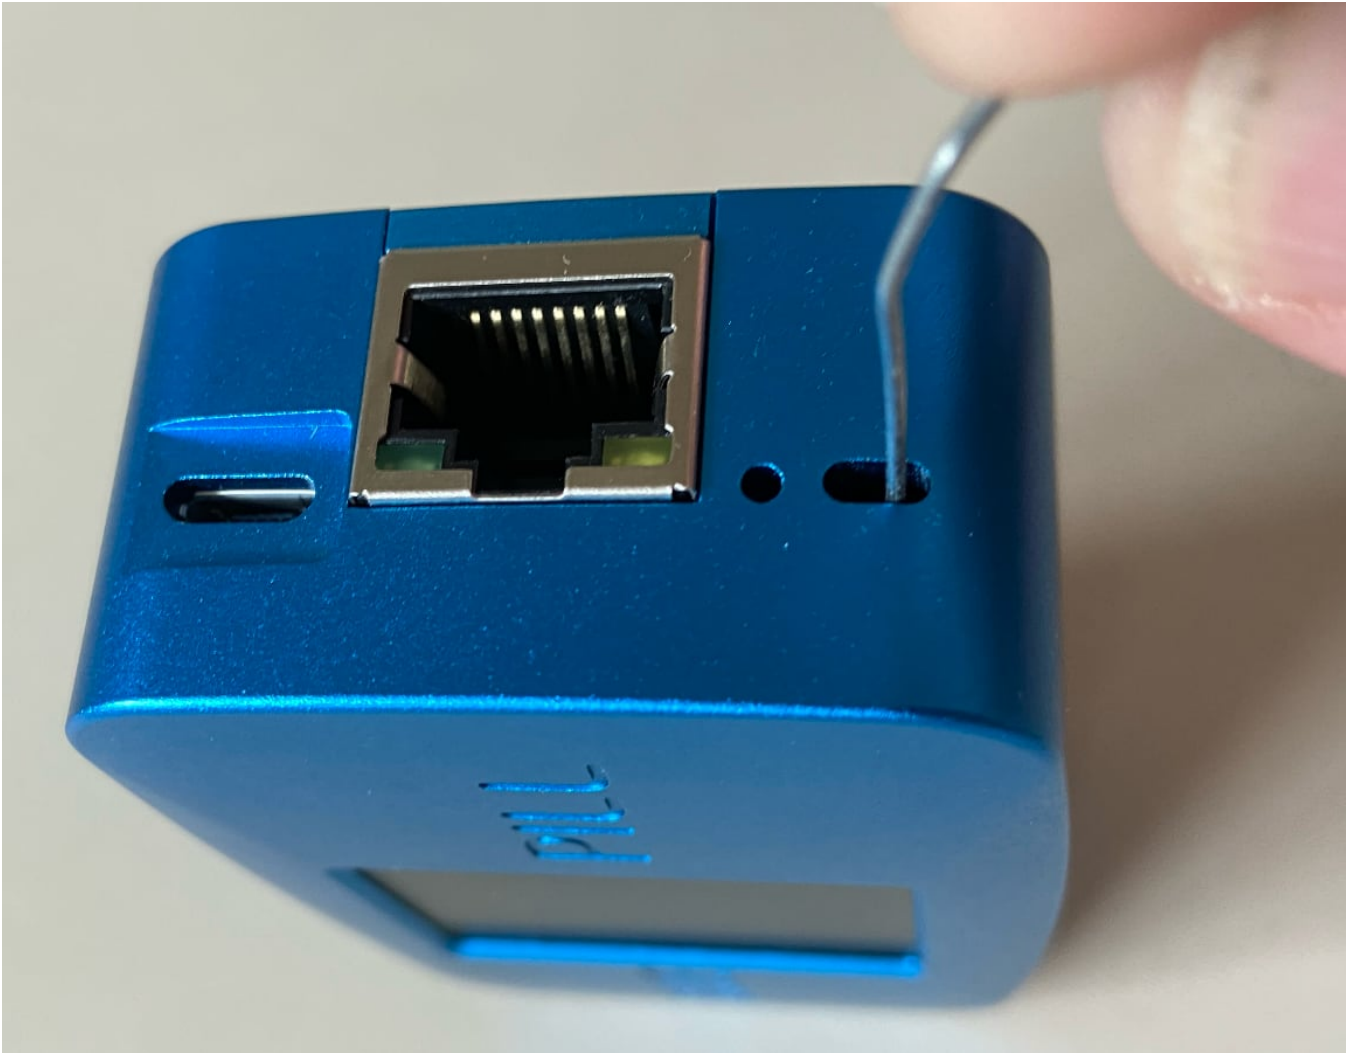

3. Username and password are now reset, and you can login with the factory default: **admin** / **skaarhoj**

The reset is temporary until one of the following things happens:

- Username/password are changed on the Settings page
- Wifi AccessPoint is disabled on the Settings page
- Device is rebooted

---

**OLD METHOD** -> used with System Manager v.1.0.8-pre7 or earlier

---


1. Open SKAARHOJ Updater app

Can be downloaded here: <https://www.skaarhoj.com/support/firmware-updater>


2. Type the shortcut to enable auto-mount Blue Pill devices:

- On Mac: [Shift][Option][Cmd] R
- On Window: [Shift][Ctrl][Alt] R

This will display the following dialogue (just leave it open for now)

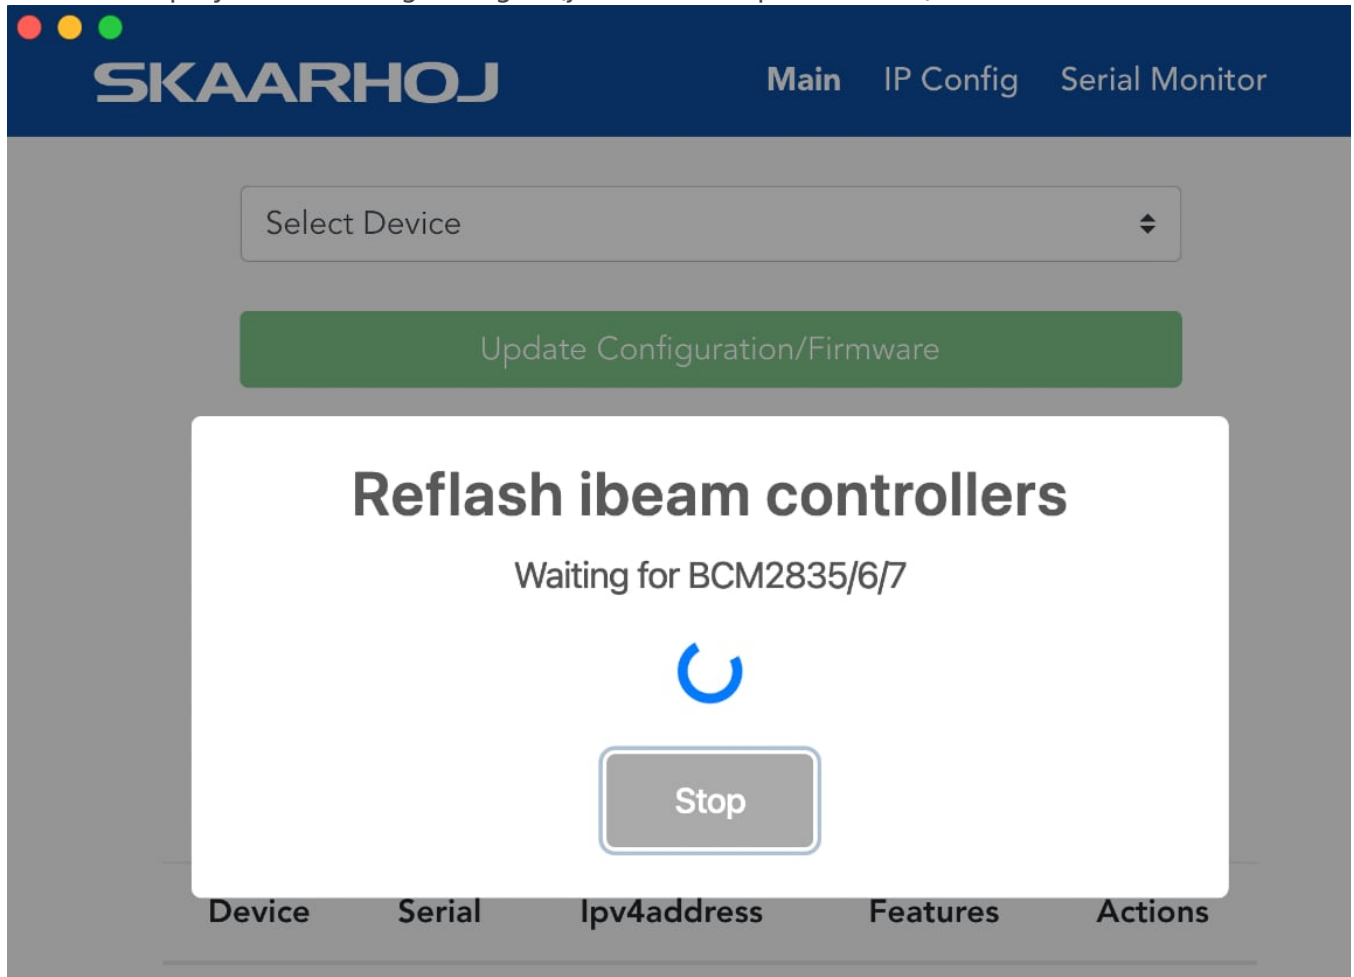

3. Insert a pin and press the config button on Blue Pill - keep holding it pressed

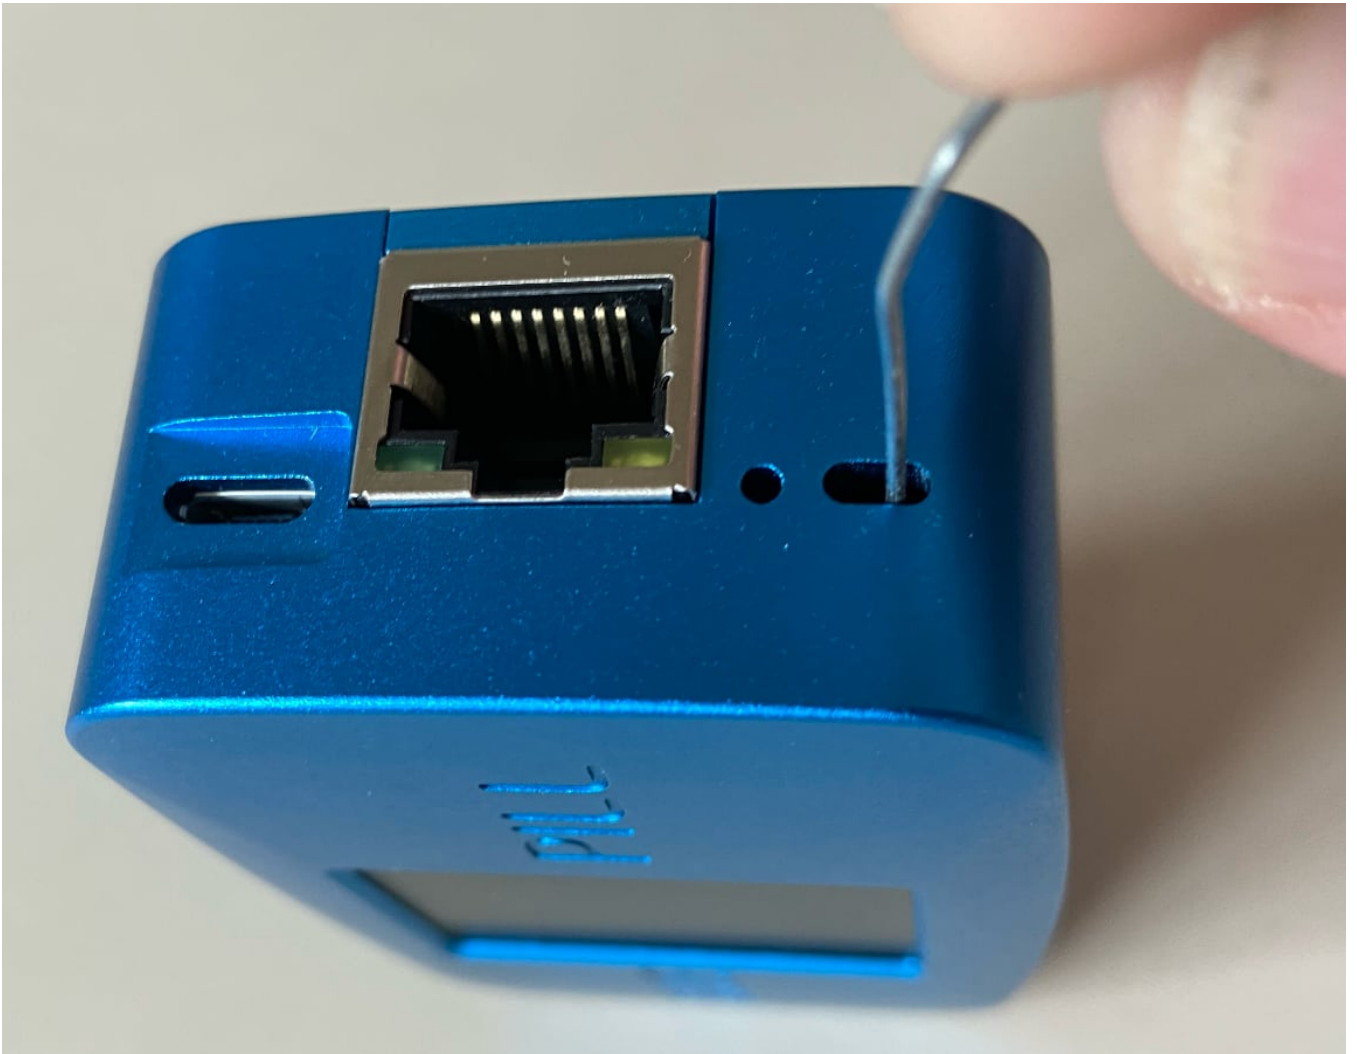


4. While holding the pin, connect USB cable from computer to Blue Pill product. (This will provide 5V, which is usually enough to power it up. If not, you must also provide power with Ethernet PoE after inserting the USB plug)



5. Almost instantly the SKAARHOJ Updater app will display "progress xx%", and after a few seconds you should see the disk volume '**skaarosboot**' appear on your Desktop (Mac) / My Computer (Win).

Please remove the pin now.

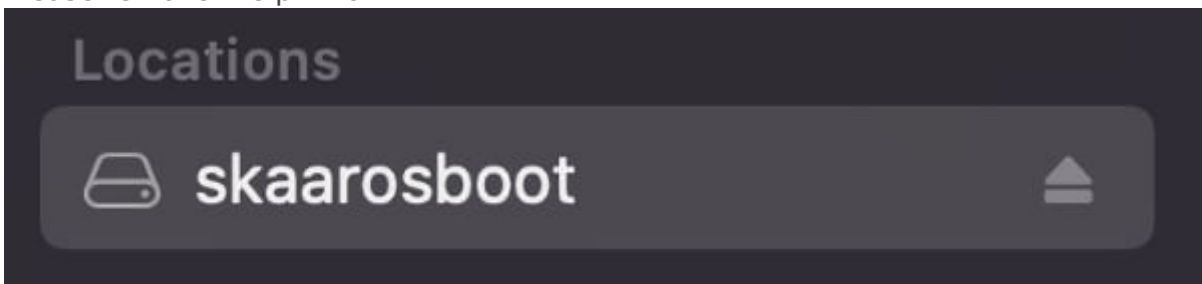

If you are not able to mount the disk (progress stays at 0% or 10%), then please contact SKAARHOJ support. They will assist you in mounting the disk using the BalenaEtcher app instead.

Send email to [support@skaarhoj.com](mailto:support@skaarhoj.com)

6. Open the disk volume '**skaarosboot**' and open the text file '**skaarhoj\_device.txt**'





## skaarosboot

### Name



bcm2711-rpi-4-b.dtb



bcm2711-rpi-cm4.dtb



boot.scr



cmdline.txt



config.txt



fixup4.dat



modules.txt



overlays



skaarhoj\_device.txt



splash.ppm




start4.elf



u-boot.bin

- Find the [Web] section, and type in new user and password. REMEMBER to save and close the file - and eject the skaarosboot volume.

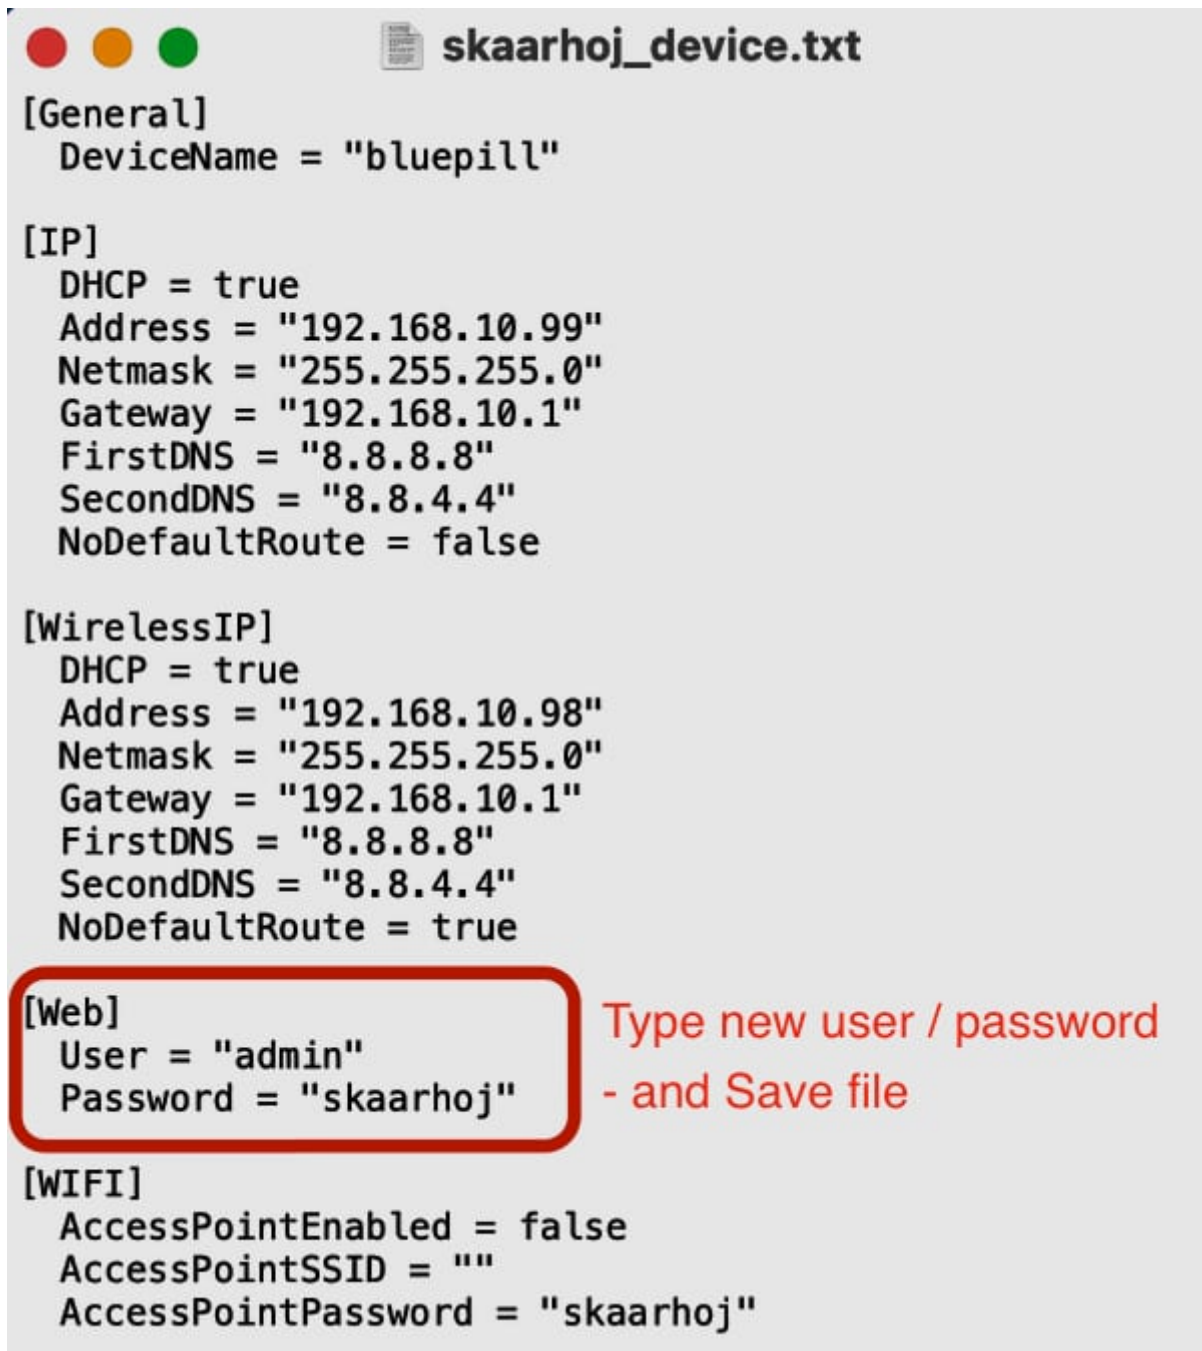

```
skaarhoj_device.txt

[General]
  DeviceName = "bluepill"

[IP]
  DHCP = true
  Address = "192.168.10.99"
  Netmask = "255.255.255.0"
  Gateway = "192.168.10.1"
  FirstDNS = "8.8.8.8"
  SecondDNS = "8.8.4.4"
  NoDefaultRoute = false

[WirelessIP]
  DHCP = true
  Address = "192.168.10.98"
  Netmask = "255.255.255.0"
  Gateway = "192.168.10.1"
  FirstDNS = "8.8.8.8"
  SecondDNS = "8.8.4.4"
  NoDefaultRoute = true

[Web]
  User = "admin"
  Password = "skaarhoj"

[WIFI]
  AccessPointEnabled = false
  AccessPointSSID = ""
  AccessPointPassword = "skaarhoj"
```

Type new user / password  
- and Save file

8. Reboot the Blue Pill device, and log in with your new username and password.

# Unable to Login In

"If you enter the correct username and password, but are left in a loop on the login screen."

Some Blue Pill devices with older software can have a bug, where the login page seems to be stuck. The solution to this is simply to use another web browser - ie. if you use Google Chrome, switch to Safari or Firefox - or vice versa.

The bug has been fixed in our later software. So, when you have successfully logged in, please goto the Settings tab and update the software.

Follow this guide to update the software:

<https://wiki.skaarhoj.com/books/blue-pill-reactor/page/update-software>