



# TSL

If you have a PTZ controller you can use TSL as the Routing trigger. That could be beneficial if you want your Camera selector to also route a source external in equipment using TSL, like Tallyman.

## 1. Add Cameras to your Controller

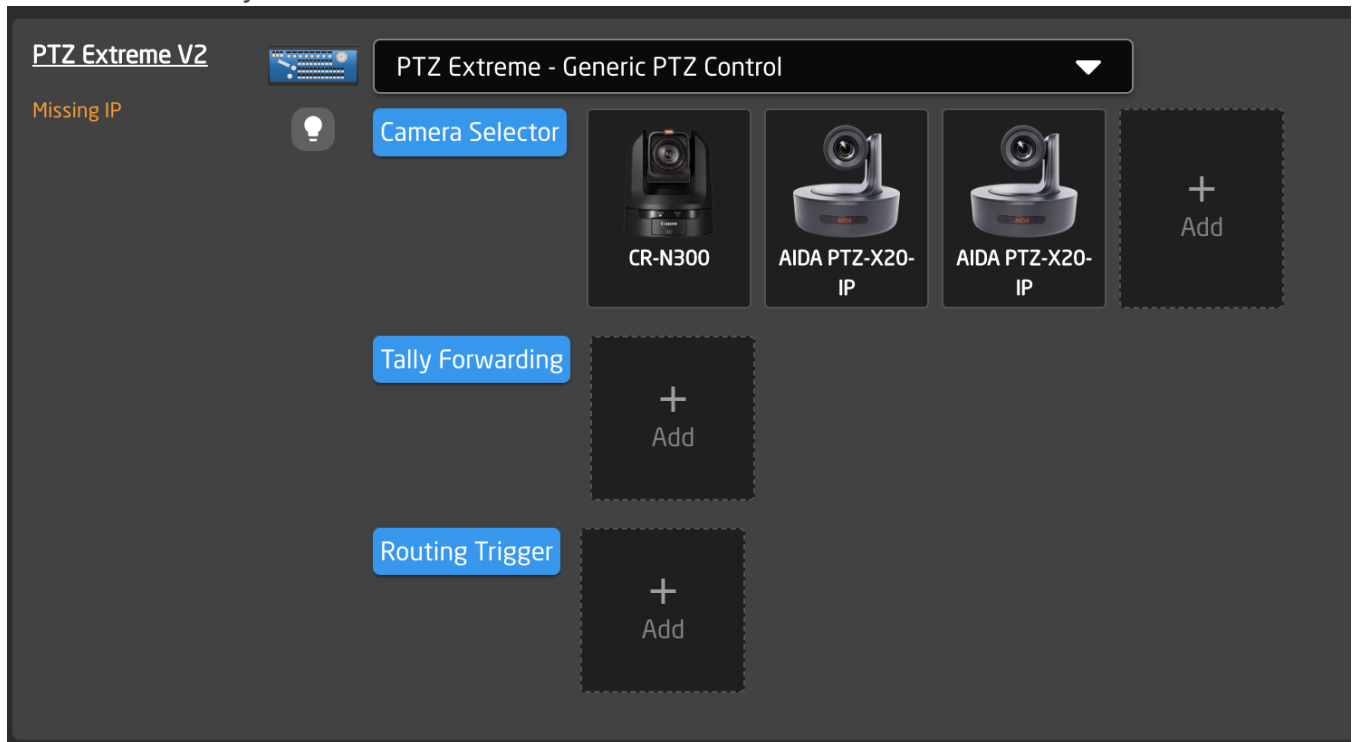


## 2. Press Camera Selector

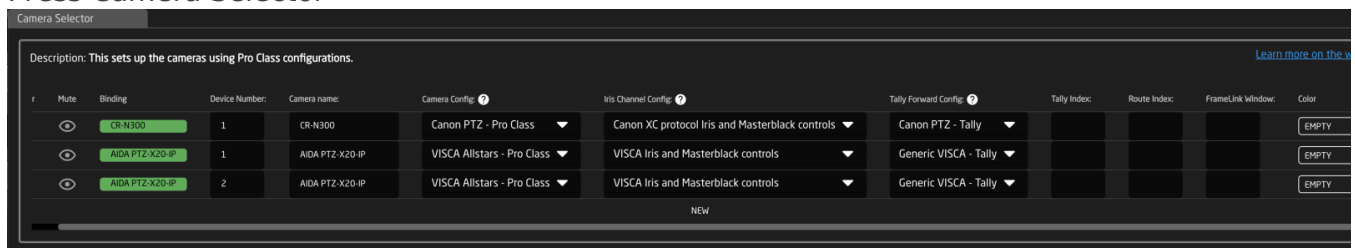

## 1. Fill in Route Index what TSL Address should be used for the specific source

## 3. Press Routing Trigger

1. Add new
2. Bind to your TSL Device

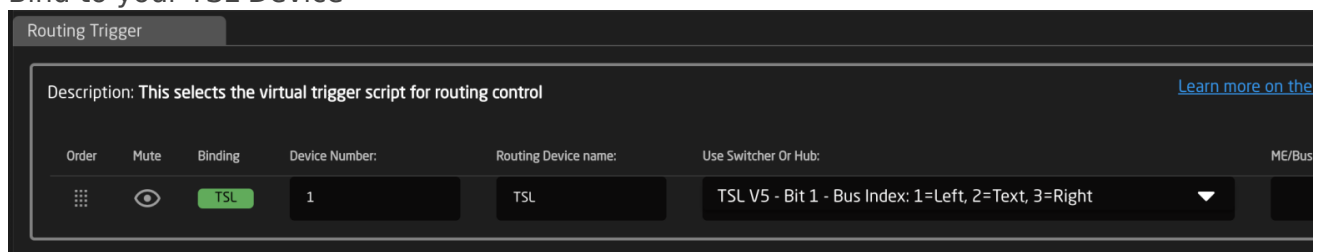

## 3. Select TSL Config in the Switcher or Hub section

TSL V3.1 - Specify Bit as a ME/Bus 1-4

TSL V5 - Bit 1 - Bus Index: 1=Left, 2=Text, 3=Right

TSL V5 - Bit 2 - Bus Index: 1=Left, 2=Text, 3=Right

4. Specify what Tally bit (v3.1) or Position (v5.0) you want to use

*Note: that the ME/Bus field is only used by TSL v3.1 and can be left blank when using TSI v5*

---

Revision #3

Created 22 November 2022 12:24:35 by Silas Sakskjær

Updated 8 January 2025 08:30:40 by Andreas Hauge Thomsen