


Settings

On the System screen is additional system related information and tools.

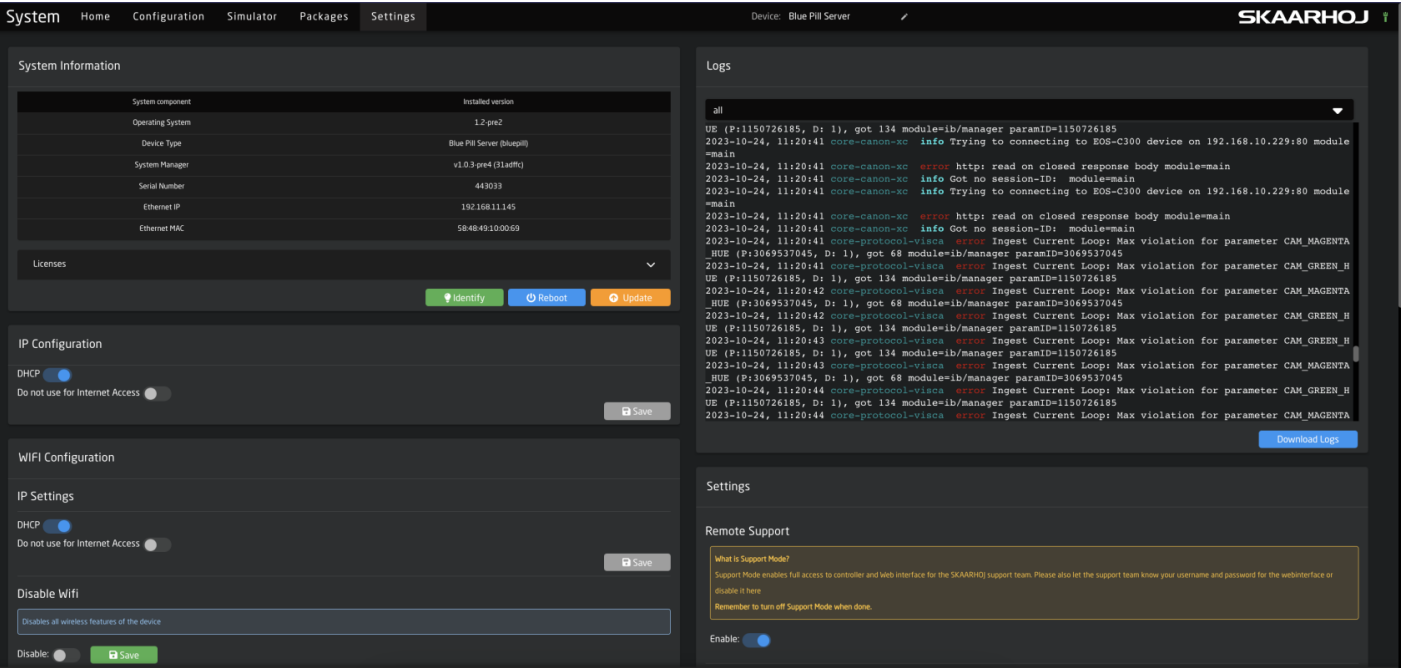

System Information

The overall System Information is displayed in this section including the Installed OS Version number for the main components, the serial number, the current IP information, the MAC address, and all assigned licenses to the device. There is the option to Identify the unit, by having the small led next to the ethernet port light red for 30 seconds, reboot the unit, or update operating system.

System Information

System component	Installed version
Operating System	1.2-pre2
Device Type	Blue Pill Server (bluepill)
System Manager	v1.0.3-pre4 (31adffc)
Serial Number	443033
Ethernet IP	192.168.11.67
Ethernet MAC	58:48:49:10:00:69

Licenses

Identify

Reboot

Update

In Advanced Mode there is the option to perform a hard reset of the Blue Pill.

Identify

Reboot

Update

Reset

Please note, doing a Reset will erase all installed packages, IP configuration, and any projects. This will return the Blue Pill to factory settings. It is not possible to recover any lost information after a Reset which is why it is hidden in Advanced Mode.

Licenses

See next sections for detailed information.

Licenses

Some specialized device cores or applications require a license (and possible license fee) to use outside of a short test period (usually 10 mins). All licenses assigned to a Blue Pill can be seen under the system information section. Each Blue Pill device will come with at least one assigned license for its general operation. For standard Skaarhoj panels that will be the "base" license. This may be different for more specialized panels.

Licenses		
Name	Options	
base	<input type="checkbox"/>	
middlelane-early	<input type="checkbox"/>	
xpanel-streamdeck	<input type="checkbox"/>	
dclink-tcp	<input type="checkbox"/>	
xpanel-xkeys	<input type="checkbox"/>	
xpanel-hids	<input type="checkbox"/>	
xpanel-touch	<input type="checkbox"/>	

Licenses can be assigned by the Skaarhoj support team. Please reach out to support@skaarhoj.com for information on any specific license and if there is an applied license fee.

After a license is assigned by the support team, it may be necessary to refresh the Settings page a few times to see the assigned license.

Internet access is needed for the Blue Pill device to touch the Skaarhoj server to register an assigned license. If that is not an option, please let the support team know.

IP Configuration

There are two options for setting the IP configuration of the Blue Pill, DHCP or Manual. To switch to Manual IP Configuration, toggle off DHCP, enter the desired IP network information, and press save.


By default the IP is set to DHCP, if DHCP is not available on the network a fallback IP address of 192.168.10.99 will be used.

IP Configuration

DHCP ☒

Do not use for Internet Access ☐

Save

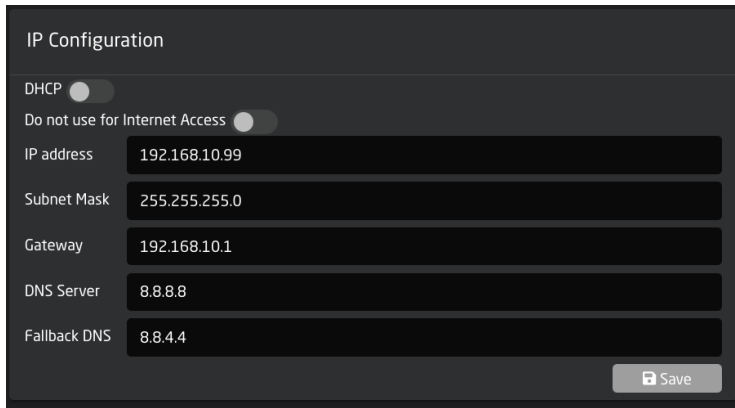

IP Configuration

DHCP ☐

Do not use for Internet Access ☐

IP address 192.168.10.99

Subnet Mask 255.255.255.0

Gateway 192.168.10.1


DNS Server 8.8.8.8

Fallback DNS 8.8.4.4

Save

Please note, changing the IP information will cause the web interface to lose connection as the IP address has been re-assigned.

By enabling the "Do not use for internet Access" toggle, you can turn off general internet connection to the Blue Pill device on networks that have general internet access.

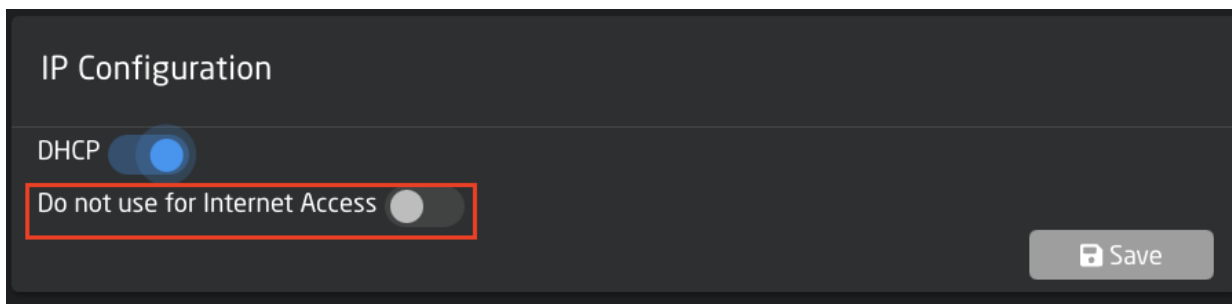

IP Configuration

DHCP ☒

Do not use for Internet Access ☐

Save

When Internet access has been restricted the ethernet cable icon in the top right corner of the screen will have changed from green to red.



Please note, internet access is needed to install, update, or revert packages. For offline updating please check out the [Updating Software](#) section of our Wiki.

WiFi Configuration

There are multiple ways the Blue Pill can interact with WiFi. There is the IP Settings for when the Blue Pill is connected to a WiFi network, the Access Point to enable a local access point to connect to the Blue Pill, and Connection Settings to connecting the Blue Pill to a local WiFi network.

WiFi is not intended as the main way to use the Blue Pill. Blue Pill is encapsulated in metal and the reach of the WiFi antenna will be very short, so consider it for very localized access, but sufficiently useful to connect to the WiFi of a camera just next to the Blue Pill device. Or to enable the WiFi access point for mobile device management.

WiFi Configuration

IP Settings

DHCP ☒

Do not use for Internet Access ☐

Save

Disable Wifi

Disables all wireless features of the device

Disable: ☐

Save

Access Point Settings

Enable: ☐

Name SKAARHOJ-443033

Password

Hide characters ☒

Save

Connection Settings

SSID (Network Name)

Password

IP Settings

There are two options for setting the IP configuration of the Blue Pill, DHCP or Manual. To switch to Manual IP Configuration, toggle off DHCP, enter the desired IP network information, and press save.

By default the IP is set to DHCP, there is no fallback static IP address for WiFi.

IP Configuration

DHCP ☒

Do not use for Internet Access ☐

Save

IP Configuration

DHCP ☐

Do not use for Internet Access ☐

IP address 192.168.10.99

Subnet Mask 255.255.255.0

Gateway 192.168.10.1

DNS Server 8.8.8.8

Fallback DNS 8.8.4.4

Save

Please note, changing the IP information will cause the web interface to lose connection as the IP address has been re-assigned.

By enabling the "Do not use for internet Access" toggle, you can turn off general internet connection to the Blue Pill device on networks that have general internet access.

IP Configuration

DHCP ☒

Do not use for Internet Access ☐

Save

Disable WiFi

Enabling the Disable WiFi feature will disable all wireless features from the Blue Pill device.

Disable Wifi

Disables all wireless features of the device

Disable: ☐

Save

Access Point Settings

Used to access the Blue Pill via an internal WiFi to establish a connection and set the needed network information for regular connection. In this section the Access Point can be enabled/disabled and the password set. The web interface is then accessed at the IP address: **192.168.4.1** By default the password is **skaarhoj**. See the [Getting Started](#) section for more information.

Access Point Settings

Enable: ☐

Name SKAARHOJ-443033

Password

Hide characters ☒

 Save

Connection Setting

Used to connect the Blue Pill to the local WiFi network. Pressing Scan will search for available networks. Clicking a network that appears after a scan will allow for the entering of the needed password to establish the connection.

Connection Settings

SSID (Network Name) Enter SSID



Password Enter Password

Scanned Networks:

TP-Link_1F5B

SKAARHOJ

SKAARHOJ-Equipment

Please note connecting the Blue Pill to both the wired and wireless networks for internet access can cause instability in the connection.

Logs

The logs are used mainly by the development team to help debug any problems. Each device core has its own logs section but it can all be seen in the systems logs section. Clicking the drop down will allow for the filtering of specific device cores/packages.

Frequently when writing to support, they will request the logs to be sent along with other information. The full panel logs can be downloaded from the Logs section of the Settings page.

Logs

all

```
odule=main
2023-10-24, 13:37:19 reactor warning Failed to connect core core-protocol
-visca at address local error=context deadline exceeded module=devices
2023-10-24, 13:37:19 reactor info Connecting Core: core-protocol-visca at
local module=devices
2023-10-24, 13:37:21 core-canon-xc info Trying to connecting to EOS-C300
device on 192.168.10.229:80 module=main
2023-10-24, 13:37:21 core-canon-xc error http: read on closed response bo
dy module=main
2023-10-24, 13:37:21 core-canon-xc info Got no session-ID: module=main
2023-10-24, 13:37:22 reactor warning Failed to connect core core-protocol
-visca at address local (pausing logging for this device till the next suc
cessful attempt) error=context deadline exceeded module=devices
2023-10-24, 13:37:26 core-canon-xc info Trying to connecting to EOS-C300
device on 192.168.10.229:80 module=main
2023-10-24, 13:37:26 core-canon-xc error http: read on closed response bo
dy module=main
2023-10-24, 13:37:26 core-canon-xc info Got no session-ID: module=main
2023-10-24, 13:37:31 core-canon-xc info Trying to connecting to EOS-C300
device on 192.168.10.229:80 module=main
2023-10-24, 13:37:31 core-canon-xc error http: read on closed response bo
dy module=main
2023-10-24, 13:37:31 core-canon-xc info Got no session-ID: module=main
```

Download Logs

Remote Support

Enabling
Blue Pill.

Remote Support

What is Support Mode?

Support Mode enables full access to controller and Web interface for the SKAARHOJ support team. Please also let the support team know your username and password for the webinterface or disable it here

Remember to turn off Support Mode when done.

Enable: ☒

network.

Please note, wired internet access needs to be enabled for support to access the Blue Pill.

USB-A

USB-A switches between the Micro USB port (on by default for service such as connection to the SKAARHOJ firmware application or re-flashing the entire unit in severe cases) and the USB-A

port which is used, for example, by our FrameLink application to grab and utilize frames for thumbnail display in panels. See the [Thumbnail Presets](#) section for more information about the FrameLink application.

USB-A

What is USB-A Port Setting?

If you would like to use the USB-A port OR the MicroUSB port on the back. Per default you can use the MicroUSB port with the SKAARHOJ Firmwareupdater to change IP config and other settings. If you like to use the USB-A port (eg with a FrameGrabber) you need to enable this setting to allow data transfer. This will temporarily disable the ability to use the MicroUSB with the firmwareupdater.

Enable: ☐

Please note, when USB-A is enabled, the USB-Micro port is disabled.

Date and Time

Date and Time allows for setting the current date and time on the Blue Pill. This can sometimes be needed for the device to check NTP when connecting to our servers for updates.

Date and Time

What is Date and Time?


Date and Time setting allows to change your current local date and time for this device

Current Date and Time: 2023-10-24 11:44:08

Current Time Zone: time/localtime

Detected Time Zone: Europe/Paris Use

Select Date and Time:

 Select Date and Time

Select Zone:

Select Time Zone ▼

Cloud

Cloud has not yet been implemented and is coming soon.

Cloud

What is Cloud?

Cloud services is currently in development state, currently unavailable

Status:

 Register

Authentication

Authentication allows for the setting of a username and password to restrict access to the Blue Pill web interface. By default the Username is **admin** and the password is **skaarhoj** This feature can also be disabled.

Authentication

Enable: ☒

Username

Password

Hide characters ☒

 Cancel

 Save

Revision #3

Created 24 October 2023 09:13:41 by Heather Pedersen

Updated 30 April 2024 08:31:03 by Kenneth Kikkenborg