


Hardware Details

Here you will find hardware diagrams for various components and general hardware information.

- [Blue Pill Panel Connections](#)
- [Graphical Displays](#)
- [Operating Temperatures](#)
- [Power over Ethernet \(PoE\) Specifications](#)
- [UniSketch Panel Connections](#)


Blue Pill Panel Connections

Blue Pill Units

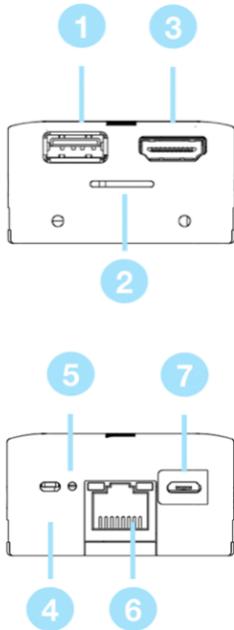

1	USB-A Port. See Settings page for more details
2	SKAARHOJ Expansion Slot. See extension cables section for more details (coming soon)
3	HDMI Port serial diagnostics and debugging
4	Config Button to enable WiFi Access Point. See Accessing Blue Pill section in Getting Started Guide
5	Status LED for monitoring and debugging
6	IP Network RJ45 Port for IP control and 5W-30W PoE (+)/PoE Standard: IEEE 802.3af/t
7	Micro USB Port for serial communication and 5V power


Blue Pill Inside Units

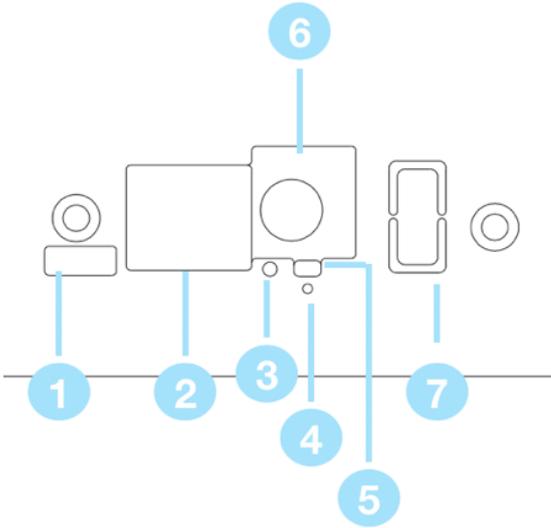

1	Micro USB Port for serial communication with SKAARHOJ Firmware Updater
2	IP Network RJ45 Port for IP control and 5W-30W PoE (+)/PoE Standard: IEEE 802.3af/t
3	Status LED for monitoring and debugging
4	Reset button. Use only under the guidance of SKAARHOJ support
5	Config Button to enable WiFi Access Point. See Accessing Blue Pill in the Getting Started Guide
6	12V DC Power Supply for connection to the supplied DC power adaptor
7	USB-A Port. See Settings page for more details, not available on all models


Color Fly DB-25 Connector

GPI is an add on option for the Color Fly v3B, it does not come standard.

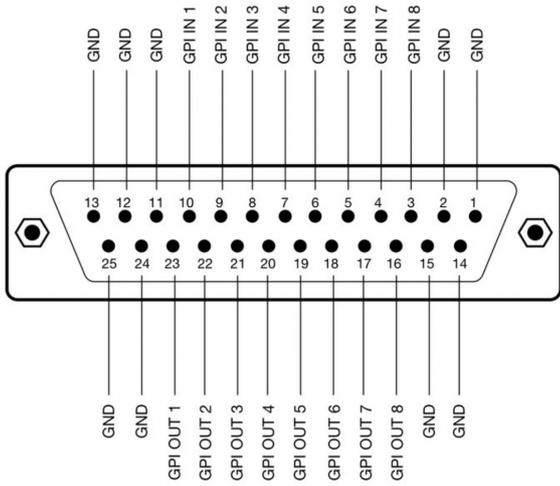


RCP Pro DB-9 Connector

The RCP Pro only has 3x GPI Input and 3x GPI Outputs that are programmable, this is different than the RCPv2.

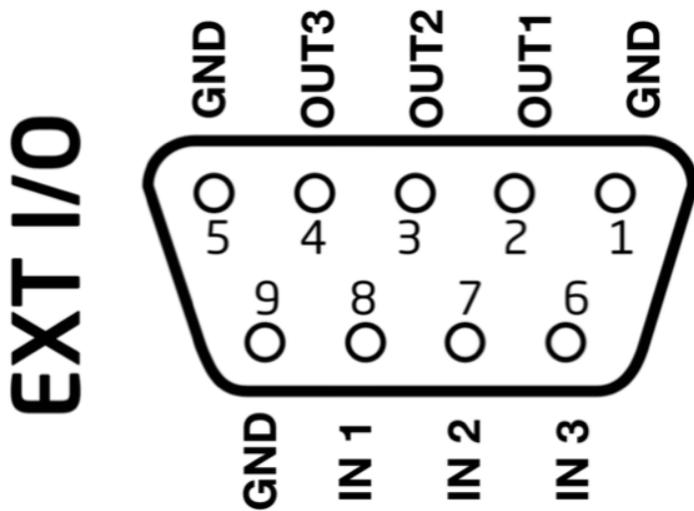

3G SDI Arduino Shield

SDI is an add on option for the Color Fly v3B, it does not come standard.

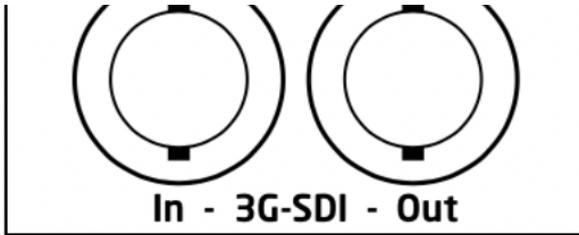

The Blackmagic 3G-SDI Arduino Shield supports the

following formats using SDI Level B: 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50 (output only), 1080p59.94 (output only) and 1080p60 (output only), but the camera doesn't have to be running the same video format as the program input, so you can use cameras in Ultra HD while the camera protocol is sent over HD signal to the camera.

Graphical Displays

Graphical Display

The Blue Pill has a graphical LED Display. By default this is set to go into a sleep mode to prevent image burn-in. The unit is still operational during sleep mode, it is only the display that effected.

Burn-In caused after disabling sleep mode is not covered by our standard warranty.

To wake the Blue Pill up from sleep mode, it should only be necessary to tap the unit. It is not necessary to shake it like a polaroid picture.

Operating Temperatures

Operating Temperatures

5V Model

The 5V model of Blue Pill has a max internal operating temperature of 80°C and should be kept in a place with good ventilation or air flow and not confined to small enclosed environment (like a box) during operation. Operating the Blue Pill in a manner where the internal temperature could reach above 80°C can cause the unit's performance to decrease. Under normal operating conditions, the Blue Pill should not get so hot as it can not be held, though the enclosure for the unit will get warm as it works as the heatsink for the CPU and built-in power supply.

The Blue Pill device's internal processes statics is accessibly by following the instructions on our wiki page:

<https://wiki.skaarhoj.com/books/blue-pill-reactor/page/internal-processes-stats>

12V Model

coming soon.

Power over Ethernet (PoE) Specifications


Power over Ethernet (PoE) Specifications

We use the PoE industry standard 5W-30W PoE (+) IEEE802.3af/t. To power our controllers using PoE it is important the switch supports this standard. Please notice some manufactures such as Ubiquity have their own non-standard 24V type of PoE which is incompatible with our controllers. Especially pay attention to the standard when using a PoE injector.

UniSketch Panel Connections

3G SDI Arduino Shield

The 3G SDI Arduino Shield imbedded in UniSketch panels is not compatible when using the UniSketch panel with a Blue Pill device. It will only function when working only via the UniSketch platform.

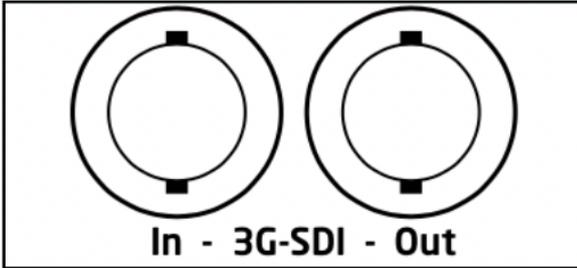


The Blackmagic 3G-SDI Arduino Shield supports the

following formats using SDI Level B: 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50 (output only), 1080p59.94 (output only) and 1080p60 (output only), but the camera does not have to be running the same video format as the program input, so you can use cameras in Ultra HD while the camera protocol is sent over HD signal to the camera.


Eth-GPI Link and Color Fly DB-25 Connector

The Eth-GPI Link and Color Fly have 8x GPI Inputs and 8x GPI Outputs, this is different than the SDI-GPI Link.

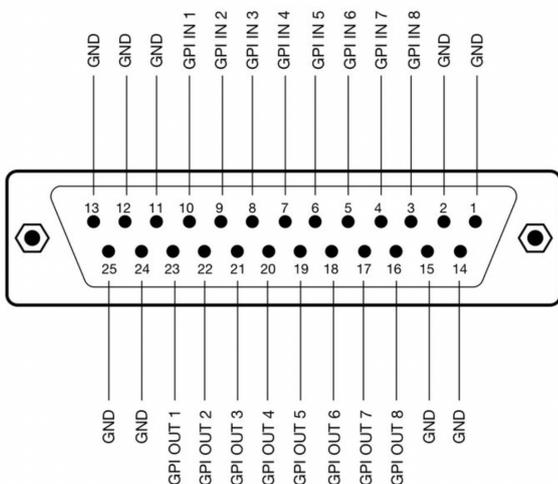


RCP v2 DB-9 Connector

The RCPv2 only has 1x GPI Input that is programmable, this is different than the RCP Pro.

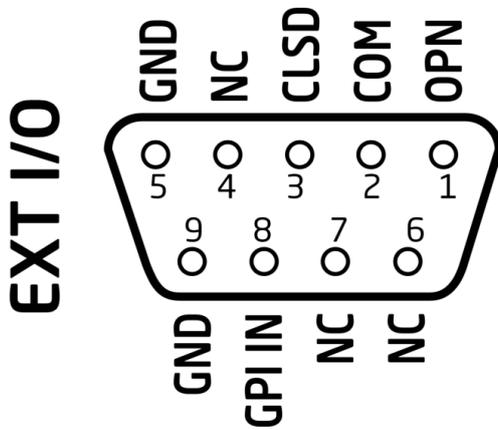

SDI-GPI Link DB-25 Connector

The SDI-GPI Link has 16x GPI Inputs and 0x GPI Outputs, this is different than the Eth-GPI Link.

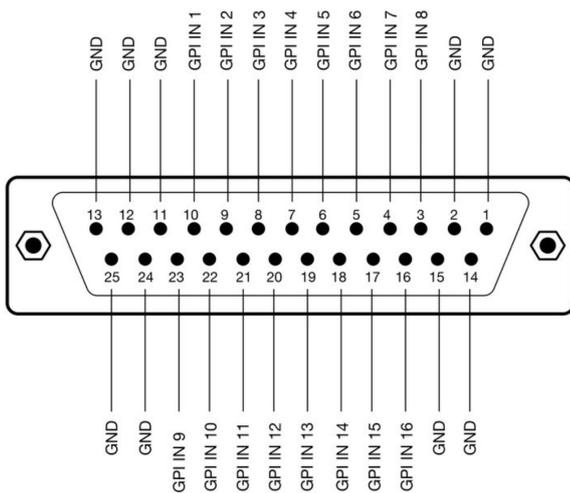


Tally Box and Lights

The pinout of the RJ-45 connector is as follows:

1. GND
2. 12V
3. 5V control signal for red tally 1
4. 5V control signal for green tally 1 The next four are for daisy-chaining tally lamps:
5. 5V control signal for red tally 2
6. 5V control signal for green tally 2
7. 5V control signal for red tally 3
8. 5V control signal for green tally 3

Our tally lamps need 12V power in order to light up the LEDs. The control signals are 5V so whenever you apply 5V on one of the pins the corresponding LEDs will illuminate.

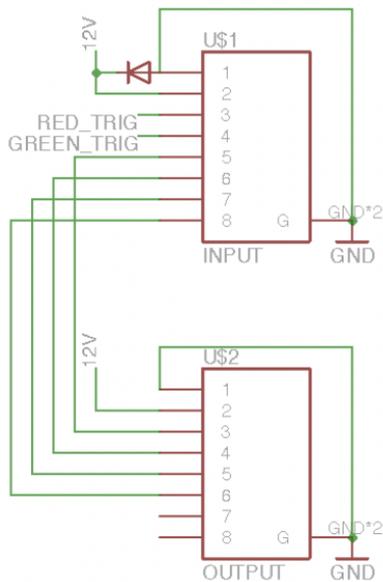

- 1=O/ (GND)
- 2=O (12V)
- 3=G/ (Red, Lamp 1)
- 4=BL (Green, Lamp 1)
- 5=BL/ (Red, Lamp 2)
- 6=G (Green, Lamp 2)
- 7=BR/ (Red, Lamp 3)
- 8=BR (Green, Lamp 3)