

# Experiments


Here you are able to disable the auto-deactivation of device cores on the Blue Pill. This is sometimes necessary when working with device cores across multiple Blue Pills.

There is also the possibility to use a different algorithm for Reactor that may improve performance in some instances. As it is not fully tested, we do not recommend using it in a production capacity.

## Guide:

- **Use any browser to access the Blue Pill via its IP address**
- **To access the Experimental page write /experiments after the IP**

Example: XX.XX.XX.XX/experiments

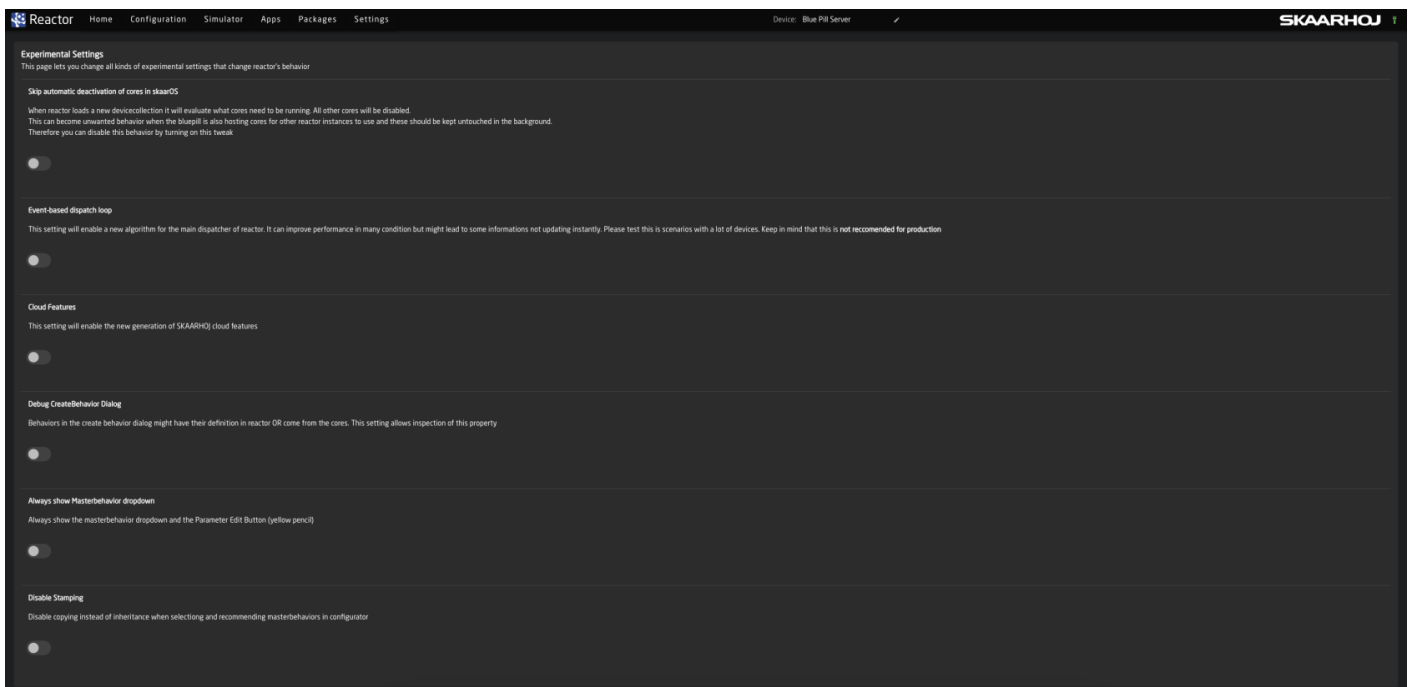

Revision #5

Created 14 June 2022 10:09:37 by Heather Pedersen

Updated 2 May 2024 08:20:16 by Heather Pedersen