























# Projects

Projects are the unit that have a title, description and references to a panel collection, a device collection and a configuration. This design provides the flexibility to use the same set of SKAARHOJ panels but quickly change to another location of devices with other IP addresses for example. Or keep the same devices and panels, but run a different configuration serving a different user group of operators.

Manage Projects			
Project Title	Description	Special Notice	Status
bluepill	Congratulations with your new bluepill! It's going to be amazing from here...	 Advanced settings used	Active

When a Blue Pill ships it has a default configuration is as below. It is set in simple view with only the basic information available.

Manage Projects						
Project Title	Description	Mode	Panel Collection	Device Collection	Configuration	Status
Blue Pill Gfx Test		Command Dispatch	BPtest		BPtest	<a href="#">Activate</a>
bluepill	Congratulations with your new bluepill! It's going to be amazing from here...	Command Dispatch	_native 	default 	X32/latest 	<a href="#">Activate</a>
Rack Fusion Live (Dev)	Development for Blue Pill with Rack Fusion Live	Command Dispatch	KaspersRackFusionLive	KaspersRackFusionLive	DevFileTest 	<a href="#">Activate</a>
SLG-Broadcast		Command Dispatch	SRT1-RCpv2 	SLG-Broadcast	RCpv2-DreamChip 	<a href="#">Activate</a>
Show Room - All Pro Class Combinations		Command Dispatch	SR-ProClassAll	SRT16-All 	SR-ProClassAll	<a href="#">Activate</a>
Show Room - All Standard Class Combinations		Command Dispatch	SR-StdClassAll	SRT16-All 	SR-StdClassAll	<a href="#">Activate</a>
Show Room PTZ Table 1+6 - Standard layout	Show Room PTZ Table with the standard display of units	Command Dispatch	SRT16-All 	SRT16-All 	SRT16-All 	<a href="#">Activate</a>
Show Room Mega Panel Table 2 w/ATEM	Show Room Table 2 with Air Fly Pro and Mega Panel set up - ATEM control	Command Dispatch	SRT2-All 	SRT2-All-ATEM	SRT2-All-ATEM/latest	Active
Show Room Mega Panel Table 2 w/vMix	Show Room Table 2 with Air Fly Pro and Mega Panel set up - vMix control	Command Dispatch	SRT2-All 	SRT2-All-vMix	SRT2-All-vMix	<a href="#">Activate</a>
Show Room Back Table 3	Show Room Table 3 with camera control	Command Dispatch	SRT3-All	SRT3-All	SRT3-All	<a href="#">Activate</a>
Show Room Back Tables 4+5	Show Room Table 4+5 with camera control	Command Dispatch	SRT45-All 	SRT45-All 	SRT45-All	<a href="#">Activate</a>
Show Room Back Tables 4+5	Show Room Table 4+5 with camera control	Command Dispatch	SRT45-All 	SRT45-All 	SRT45-RCpv2Only	<a href="#">Activate</a>
Saddleback Church		Command Dispatch	SaddlebackChurch	SaddlebackChurch	SaddlebackChurch	<a href="#">Activate</a>
Studio	Configuration for SKAARHOJ Studio	Command Dispatch	Studio-All	Studio-All	default 	<a href="#">Activate</a>
Kairos Defalut Config 0.1		Command Dispatch	kairosise2022/latest 	kairosise2022/latest 	kairosise2022/latest 	<a href="#">Activate</a>
	This collections is not used in any of your projects		BPtest/latest			
	This collections is not used in any of your projects		KaspersRackFusionLive/latest			
	This collections is not used in any of your projects		SK_RCPV2_MFADER/latest			
	This collections is not used in any of your projects		SR-ProClassAll/latest			
	This collections is not used in any of your projects		SR-StdClassAll/latest			
	This collections is not used in any of your projects		SRT16-All/latest			
	This collections is not used in any of your projects		SRT2-All/latest			

Create new project Import/Export

Unlike UniSketch where a change of configuration and device cores needed an online connection to SKAARHOJ server, on Blue Pill everything is stored locally in Reactor. Only software upgrades or installations of non-existing with device cores and applications need communication with the server.

## Creating Projects

To create a new project click Manage Project within Reactor Home.

Select Create new project on the projects pop up.

Manage Projects

Show Advanced

Project Title

Description

Special Notice

Status

bluepill

Congratulations with your new bluepill! It's going to be amazing from here...

!

Advanced settings used

Active

Create new project

Import/Export

There are two main parts of the project: Name and Description.

Project Details

Show Advanced

Title:

bluepill

Description:

Congratulations with your new bluepill! It's going to be amazing from here...

Save

Name	Customizable project name
Description	Option description of the project for reference

Advanced brings with it additional project options.

Project Details

Show Advanced

Title:

Manual

Description:

Type the descriptions of the project

Mode:

☒ Normal

☐ Devices only

☐ Demo

☐ Mono Panel

Filename:

Manual

Panel Collection:

Manual Version: latest

New

Device Collection:

Manual Version: latest

New

Configuration:

Manual Version: latest

New

Activate

Delete

Duplicate

Export


Save

Mode	<div>1. Normal for normal operation</div> <div>2. Devices only for when a Blue Pill will only be used to run device cores and not panels</div> <div>3. Demo runs a color slash across the connected controllers</div> <div>4. Mono panel for working with multiple panels as one in raw panel mode</div>
File Name	Master name for the file when making new collection, configuration, and exports
Panel Collection	Allows for the sharing of panel collections across projects on a Blue Pill
Device Collection	Allows for the sharing of devices collections across projects on a Blue Pill


<b>Configuration</b>	Allows for the selection of a specific layer files in the configuration across projects on a Blue Pill
<b>Activate</b>	Makes the project the current active project. The project needs to be active to use or work with it
<b>Delete</b>	Deletes the project
<b>Duplicate</b>	Duplicates the projects
<b>Export</b>	Allows for the exporting of the projects

## Import/Export Projects

It is also possible to import and export projects to more easily share between different Blue Pill devices. This option is available next to create new projects in the Manage Projects pop up. You can also right-click a project name to open a context menu, where you can select 'Export project'.

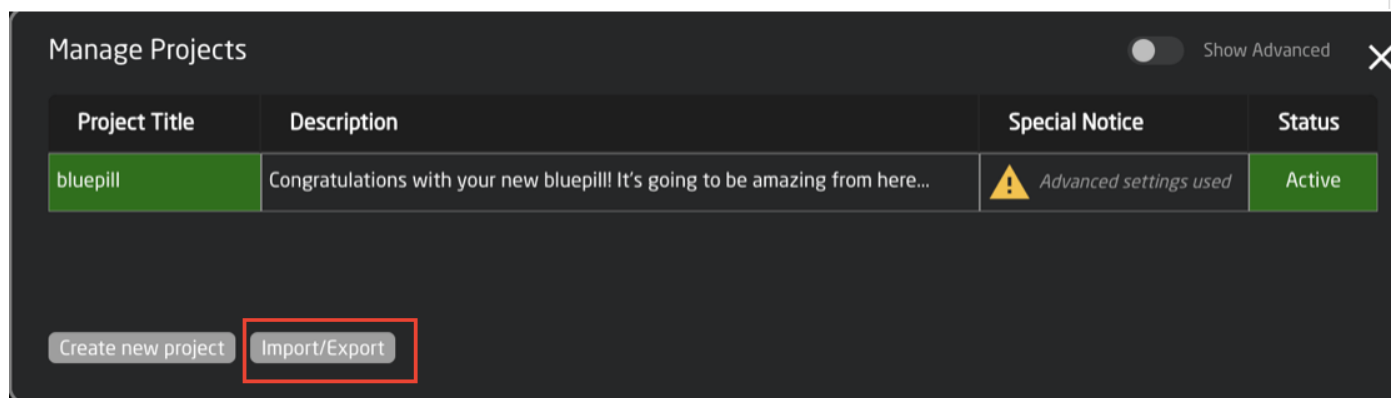

Import allows for a simple file upload. With the option to have the file name become the project name.

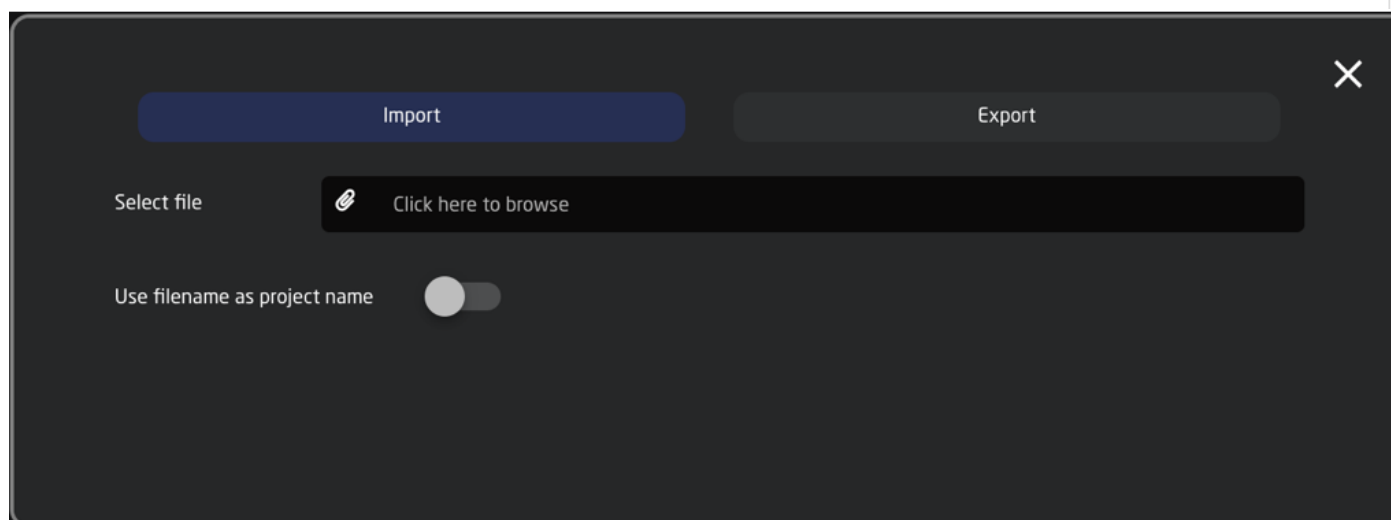

Export allows for the selection of what to include or exclude from the file. This can be the panels, devices, or configuration. This is specific project based and not for the entire Blue Pill.

×

ImportExport

Select projectbluepill

Exclude Panels


Exclude Devices

Exclude Config

Disable Config Consolidation

Export

To change the details of the project click the project name within Reactor Home



Or within any of the project detail boxes on the projects pop up.

Project Title	Description	Special Notice	Status
bluepill	Congratulations with your new bluepill! It's going to be amazing from here...	Advanced settings used	Active

It is then possible to customize the name and description of the project. Press Save.

Project Details

Show Advanced

Title:

bluepill

Description:

Congratulations with your new bluepill! It's going to be amazing from here...

Save

Enabling Advanced view brings about extra options for editing the project outside of the basic details, the same as would be seen when creating a new project.

### Layer Configuration Version Look Up

In the layer configuration section, it is possible to access autosaved versions of the configurations. This is useful when a lot of changes have been made and it is necessary to roll things back a little.

When in the Configuration section, click on the little clock symbol next to the layer to see previous versions.

Project Details

Show Advanced

Title:

bluepill

Description:

Congratulations with your new bluepill! It's going to be amazing from here...

Mode:

☒ Command Dispatch

☐ Demo

☐ Mono Panel

Filename:

Default

Panel Collection:

\_native Version: latest

New

Device Collection:

default Version: latest

New

Configuration:

default Version: latest

New

Duplicate

Export

Import/Export

default Version: latest

SKAARHOJ.Controllers.ARRI.Official Version: latest

SKAARHOJ.Controllers.AirFly.ATEM.classic Version: latest

SKAARHOJ.Controllers.AirFly.vMix.basic Version: latest

SKAARHOJ.Controllers.LiveFly+XPoint24.ATEM.classic Version: latest

SKAARHOJ.Controllers.LiveFly.ATEM.Classic Version: latest

SKAARHOJ.Controllers.LiveFly.Sony.basic Version: latest

SKAARHOJ.Controllers.LiveFly.vMix.basic Version: latest

SKAARHOJ.Controllers.MicroFly.ATEM.basic Version: latest

SKAARHOJ.Controllers.MiniFly.ATEM.basic Version: latest

SKAARHOJ.Controllers.QuickPad.ATEM.basic Version: latest

SKAARHOJ.Controllers.RackFlyDuo.Aja-Kumo Version: latest

SKAARHOJ.Controllers.RackFlyDuo.Optocore.Generic Version: latest

SKAARHOJ.Controllers.RackFlyTrio.Aja-Kumo Version: latest

SKAARHOJ.Controllers.RackFlyTrio.Optocore.Generic Version: latest

SKAARHOJ.Controllers.RackFlyUno.Aja-Kumo Version: latest







SKAARHOJ.Controllers.RackFlyUno.Netio Version: latest

SKAARHOJ.Controllers.RackFlyUno.Optocore.Generic Version: latest

Save

Available versions are: every change from the last 24 hours and as 1 file per day for 10 days.

It is also possible to add tags or comments to individual versions. When a tag or comment is added to the version, it will no longer be deleted based on the default time scale and will persist.

Version Tags		Created
  latest Tags: No tags		01/07/2022, 12:04:48 PM
  Tags: No tags	<a href="#">Set as latest</a>	01/03/2022, 03:26:34 PM
  Tags: No tags	<a href="#">Set as latest</a>	12/03/2021, 11:58:51 PM
Rows per page: 15 ▼ 1-3 of 3 < >		

Revision #7

Created 7 October 2022 07:19:53 by Heather Pedersen

Updated 2 May 2024 08:59:31 by Heather Pedersen