


# Switching Projects via a Button in Reactor

Reactor allows to switch the current project easily using a button.

Please Note, changing the current project will disconnect controllers if they are not configured in the project that is being switched to.

Make sure to configure the projects to be switched between in each project.


In the Project Manager, open the project details for the project you want to switch to. Copy the project's Filename exactly. It is necessary to toggle on Show Advanced to see the file name.

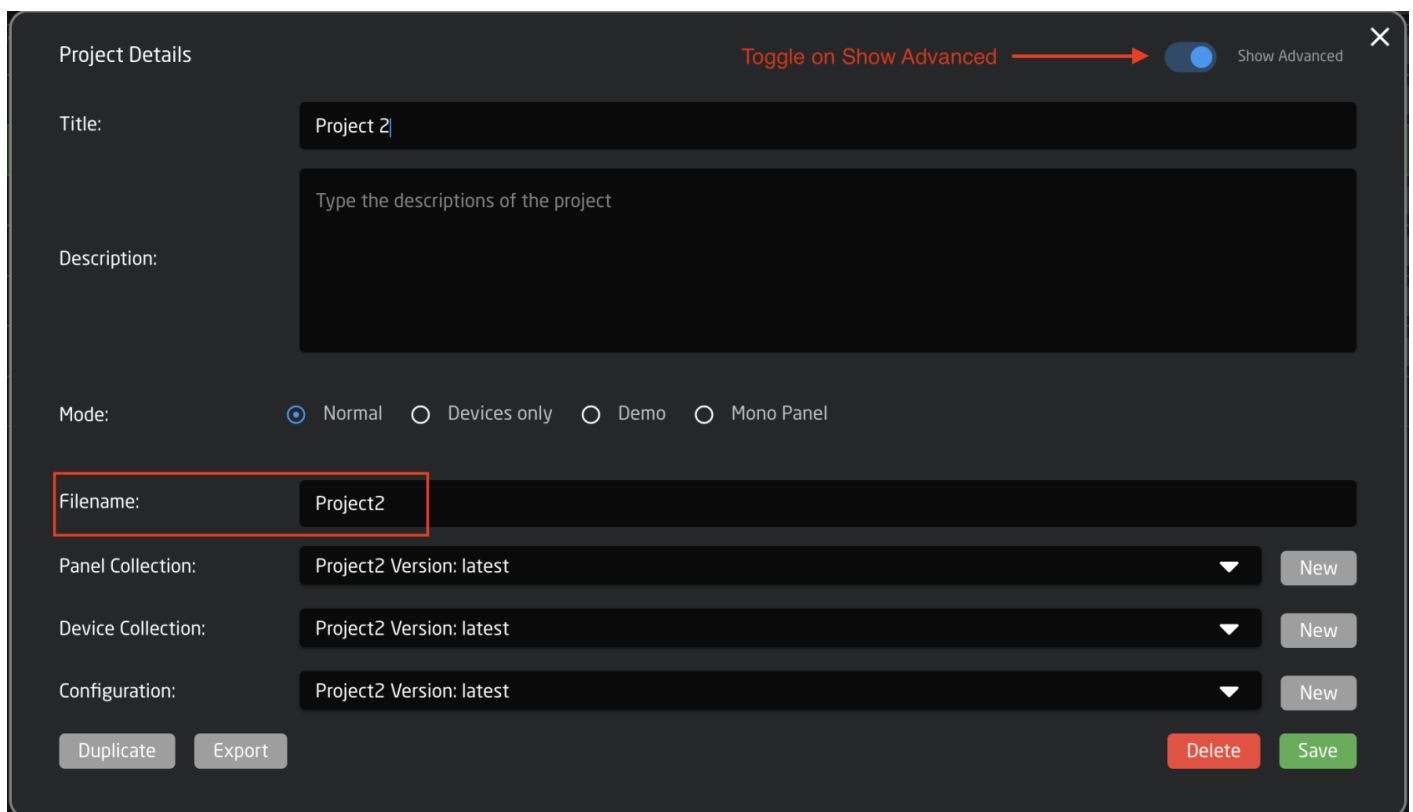


The screenshot shows the 'Project Details' dialog box. At the top right, there is a toggle switch labeled 'Show Advanced' which is currently turned on. A red arrow points to this toggle with the text 'Toggle on Show Advanced'. The dialog contains the following fields and controls:

- Title:** A text input field containing 'Project 2'.
- Description:** A large text area with the placeholder text 'Type the descriptions of the project'.
- Mode:** A group of radio buttons with options: 'Normal' (selected), 'Devices only', 'Demo', and 'Mono Panel'.
- Filename:** A text input field containing 'Project2', which is highlighted with a red rectangular box.
- Panel Collection:** A dropdown menu showing 'Project2 Version: latest' and a 'New' button.
- Device Collection:** A dropdown menu showing 'Project2 Version: latest' and a 'New' button.
- Configuration:** A dropdown menu showing 'Project2 Version: latest' and a 'New' button.
- Buttons:** At the bottom, there are 'Duplicate' and 'Export' buttons on the left, and 'Delete' and 'Save' buttons on the right.

On the Configuration Page, select the button to configure. In the Inspector, select Switch Project under the System options.

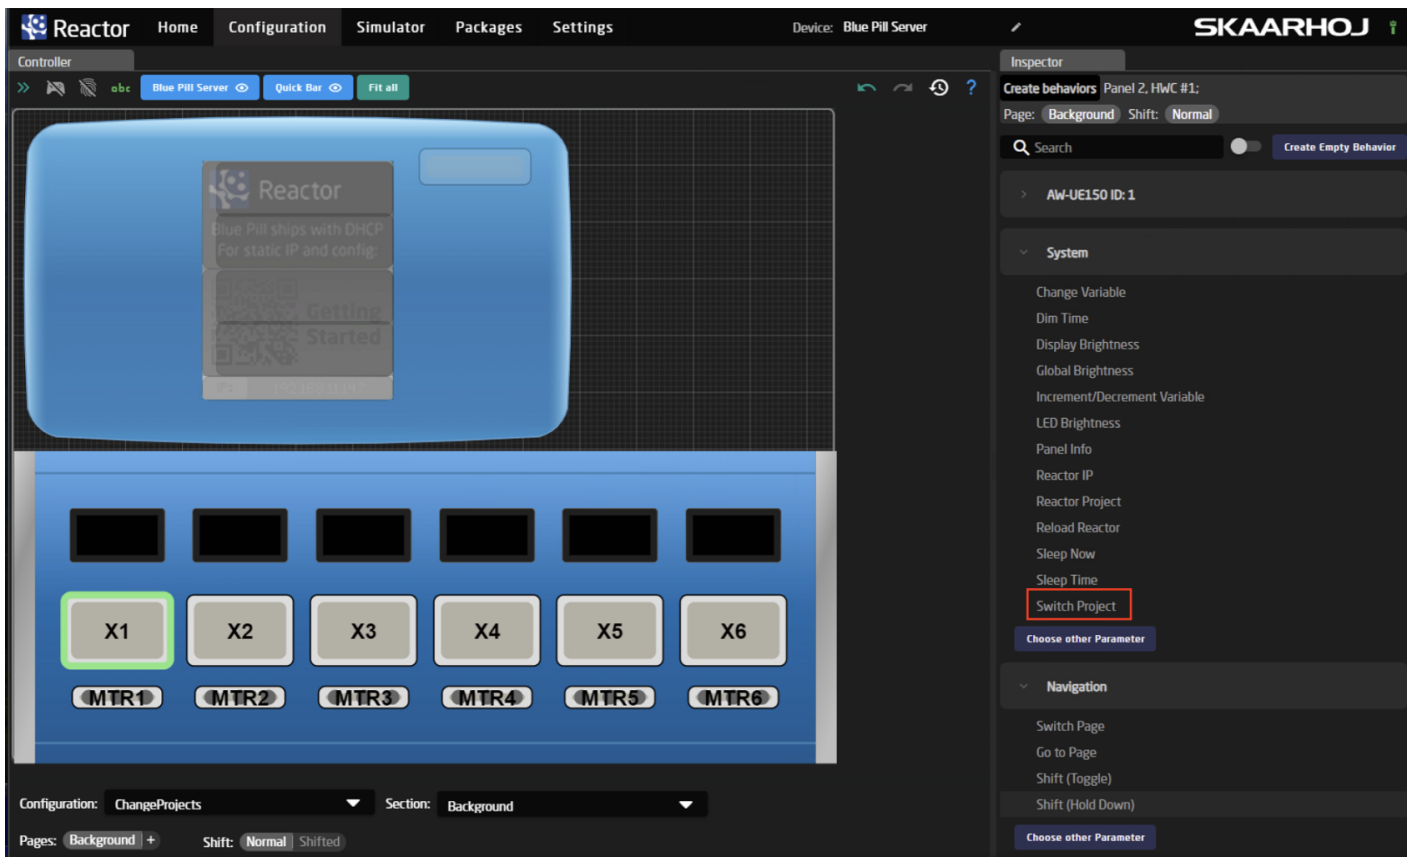

In the Inspector box, the parameter should open with a preselected selected Settings Template.

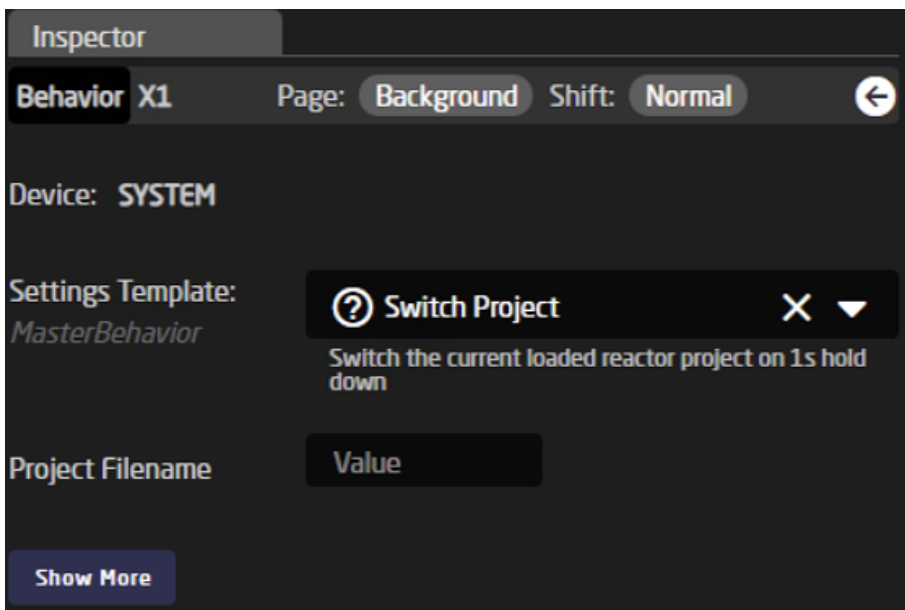

Fill in the Project Filename that was copied from the Project Manager into the Value field next to Project Filename. It is important that the file name is copied exactly as found in the Project Manager.




The project name should now appear on the display above the button (if the button does have an associated display).

Please Note, the switch is activated by a 1 second hold down of the button.




Another way to do it without the 1 second hold down.


On the Configuration Page, select the button to configure. In the Inspector, select Choose Other Parameter under the System option.

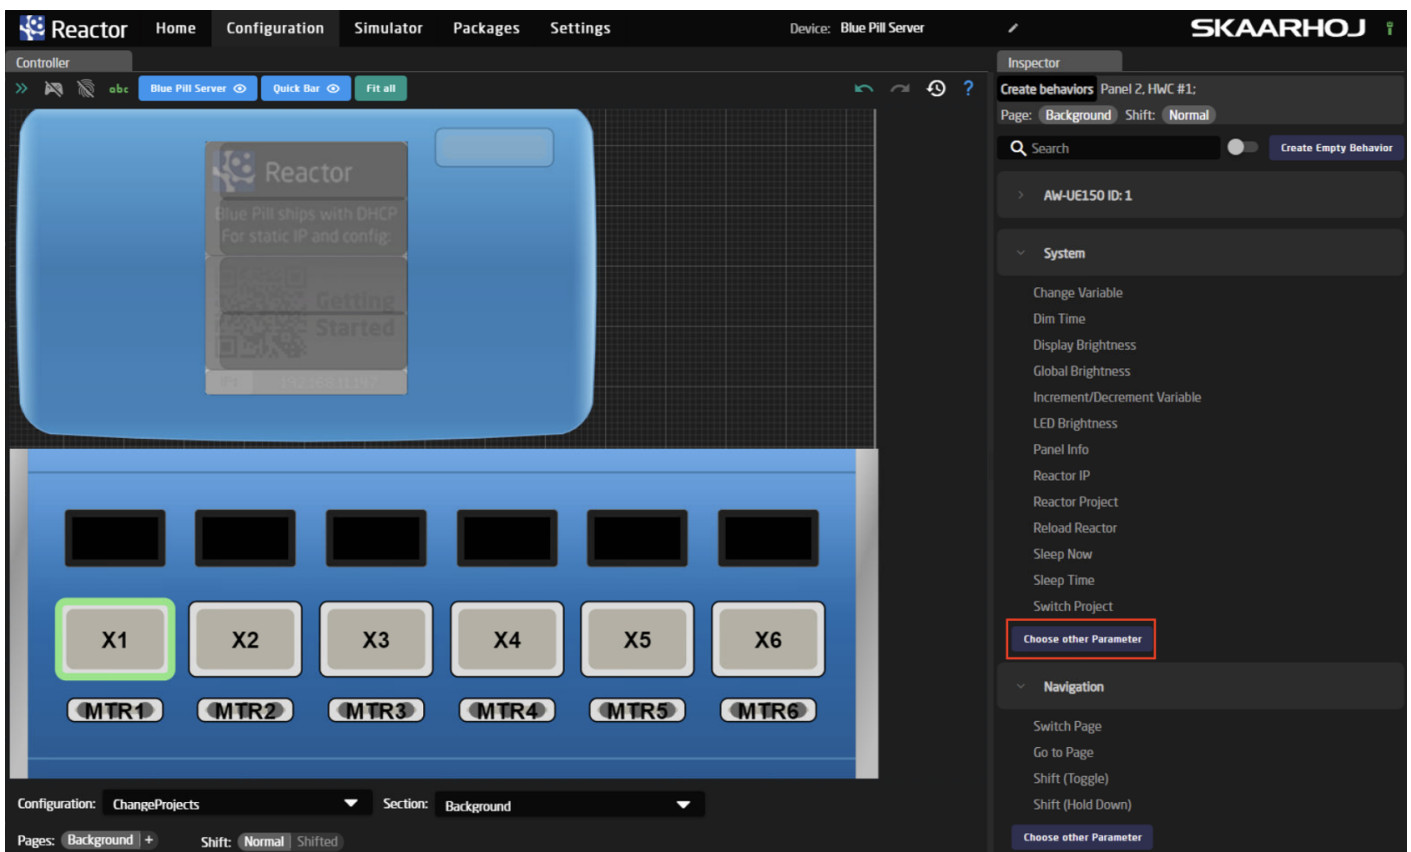


In the dialog box that pops up select: Reactor/CurrentProject then Submit

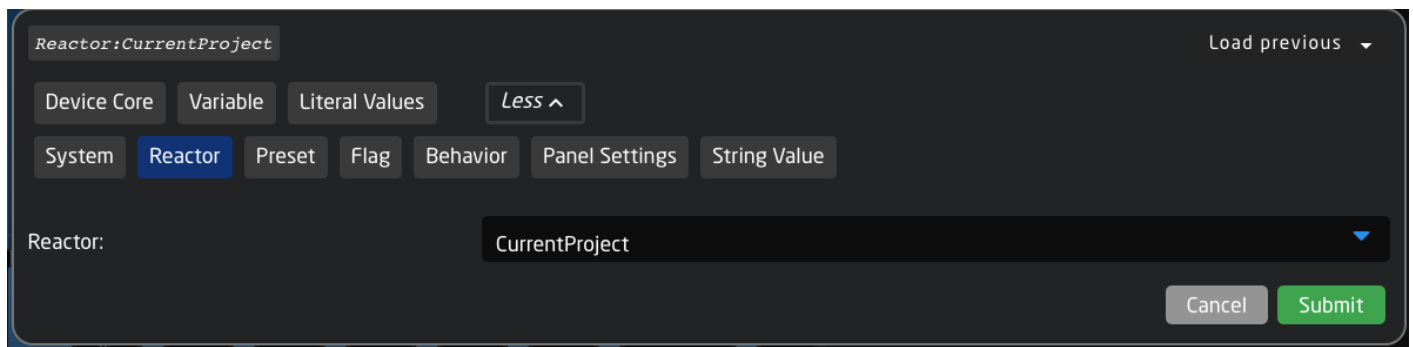

Returning to the Inspector, select Show More if you do not see Settings Template available.

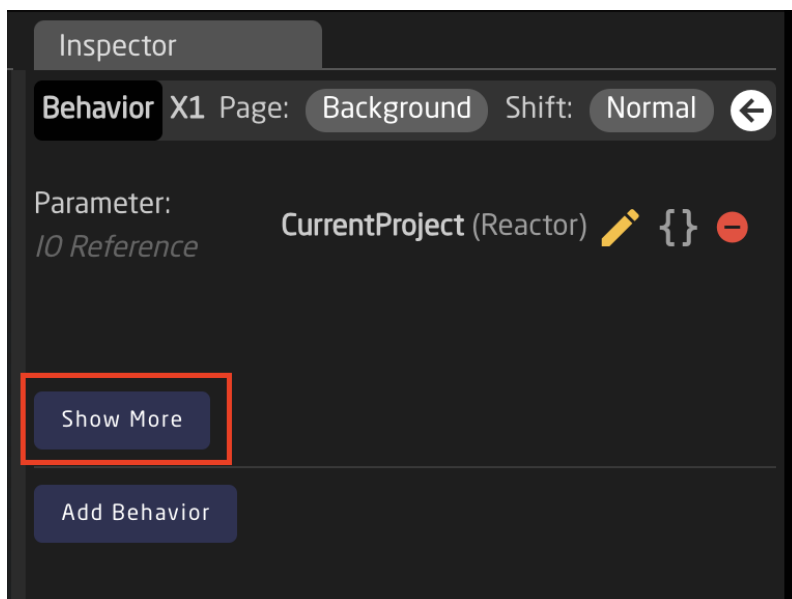

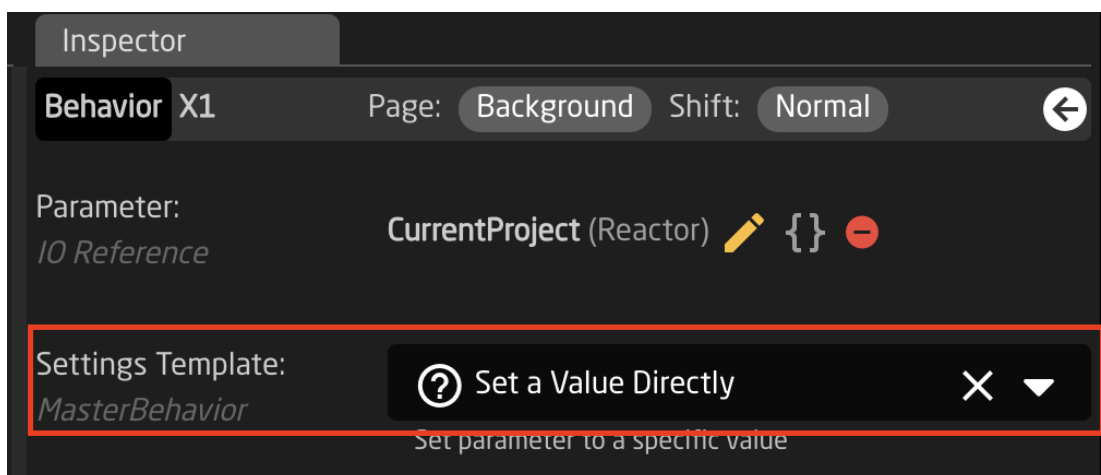


In the Settings Template, select Set Value Directly:






This should then give you the option to define the value needed.

The first box will contain the Project File Name as directly copied from the Project Details. The second box can contain any name you would like to be displayed on the hardware panel.

Parameter:  
*IO Reference*

CurrentProject (Reactor)   

Settings Template:  
*MasterBehavior*

 Set a Value Directly  

Set parameter to a specific value

Value

Project2 ▼ Project 2

Project File Name Display Label Name

Show More

You should end up with a button like this:



Revision #6

Created 2 June 2023 09:55:48 by Lukas Bachschwell

Updated 6 February 2024 10:08:36 by Heather Pedersen