

Sharing Device Cores Across Different Blue Pills

For some workflows it may be necessary to have a package running on a one Blue Pill and use it on another.


Example 1: You are controlling and Atem, and are on a different continent, the latency would probably not work well over the distance with Atem's own protocol, so you use the Blue Pill, then the Blue Pill to Blue Pill communication does handle latency better.

Example 2: When combining multiple Blue Pills at the cameras with Blue Pill Expansion Cables, you have to run the cores locally as they need serial access, but you probably want a central instance of reactor controlling all of them.

Process:

To connect two BP/BPI devices when a device core/package is running on one but not the other:

1. Install DeviceCore-Connector package on the BP running the needed package
2. AccessMode= default-allow

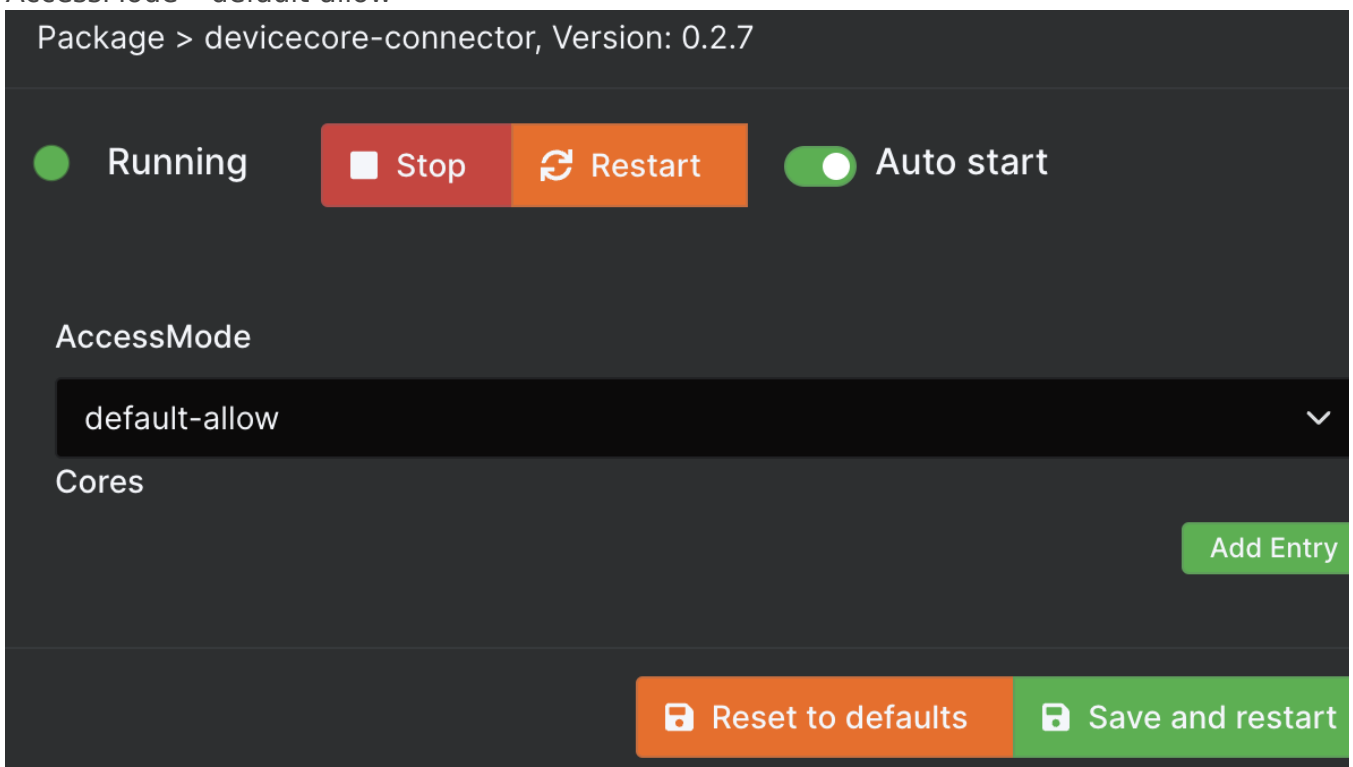

3. On the BP not running the package, set an IP address of the Blue Pill device running the device core in the device core detail section of Devices

Canon XC

Development Status: released

Save Current State for Simulation

Parameter List

Autofix potential problems

Address

IP ADDRESS OF BLUE PILL DEVICE RUNNING THE CORE

Simulate

☐

i

Core specific config for this core is defined on a different bluepill. Please go to <http://IP ADDRESS OF BLUE PILL DEVICE RUNNING THE CORE> to configure this core

Core specific settings:

Persistent Storage

☐


Save thumbnails and preset settings between reboots, if disabled it will clear all saved data!

Delete

Save

Please note, it is important to have the Device IDs for each connected device match on every instance of Blue Pill it is located. This is what helps the Blue Pill properly identify each device. The Device ID will be unique per panel and per device core.

The Device ID is found in the Device Details for each connected device.



Missing IP
Development status: beta

CR-N500

✕

Active☒

Name

CR-N500

Device Id

1

Model Id

CR-N500

Description

IP

192.168.10.223

The IP address of the Canon device

Username

The Username for the Canon device

Device Password

The password that is set on the device

👁

Delete

Discard

Save

Revision #8

Created 18 March 2022 09:32:40 by Heather Pedersen

Updated 18 June 2025 11:22:28 by Heather Pedersen